


BEIJING GRIP PIPE TECH CO., LTD

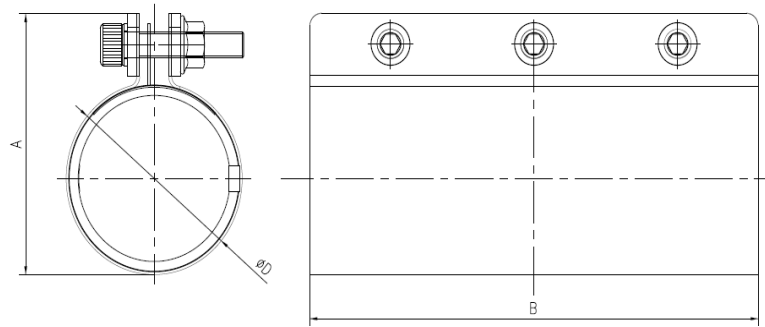

GRIP-S										
Pipe outside diameter		Clamping range	Working pressure		Product O.D.	Width	Height	Setting gap between pipe ends		Torque rate
O.D.		Min-Max			Φ D	B	A	without strip insert	with strip insert (Max)	
(mm)	(In.)	(mm)	(bar)	(bar)	(mm)	(mm)	(mm)	(mm)	Max (mm)	(Nm)
38	1.496	37-39	16	32	50	100	60	5-8	10	10
40	1.575	39.5-41.5	16	32	55	100	65	5-8	10	10
45	1.772	44-46	16	32	60	100	70	5-8	10	10
48.3	1.902	47-49	16	32	65	100	75	5-8	10	10
50.8	2.000	50-52	16	32	70	100	80	5-8	10	10
60.3	2.374	59-61	16	32	80	100	90	5~10	15	10
70	2.756	68-71	16	32	90	100	100	5~10	25	20
76.1	2.996	75-77	16	32	98	150	110	5~10	25	20
84	3.307	83-85	16	32	105	150	120	5~10	25	20
88.9	3.500	88-90	16	32	112	150	125	5~10	25	20
101.6	4.000	100-103	14	28	125	150	135	5~10	25	25
108	4.252	106-109	14	28	135	150	145	5~10	25	25
114.3	4.500	113-116	14	28	142	150	150	5~10	25	25
127	5.000	126-128	14	28	155	150	165	5~10	35	40
129	5.079	128-130	14	28	162	150	170	5~15	35	40
133	5.236	131-135	14	28	170	150	175	5~15	35	40
139.7	5.500	138-142	14	28	176	150	180	5~15	35	40
141.3	5.563	140-143	14	28	180	150	185	5~15	35	40
159	6.260	158-161	14	28	200	150	205	5~15	35	40
168.3	6.626	167-170	14	28	215	150	215	5~15	35	40