
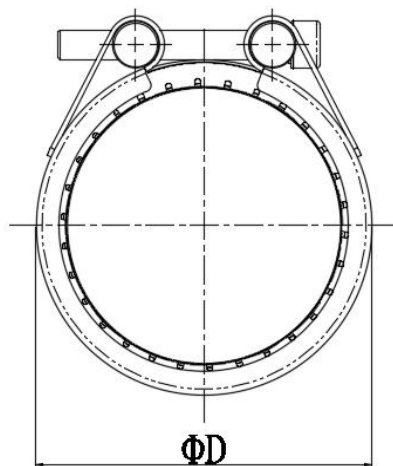


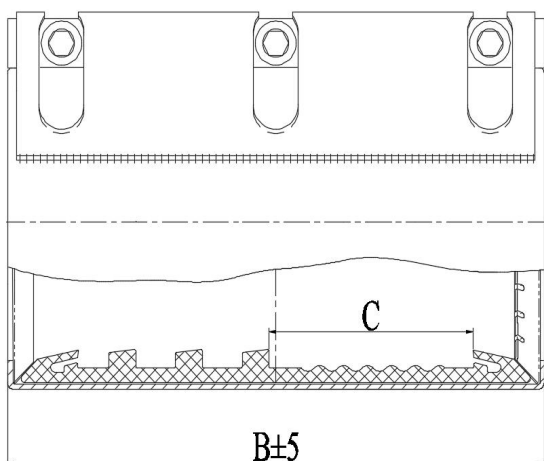

## GRIP-G/M

| Pipe O.D | Clamping Range | PN    | Product ΦD | Width B | Distance between sealing slips C | Setting gap between pipe ends | Torque rate | Bolt    | Deflection Angle ° | Axial Movement |
|----------|----------------|-------|------------|---------|----------------------------------|-------------------------------|-------------|---------|--------------------|----------------|
| (mm)     | (mm)           | (bar) | (mm)       | (mm)    | (mm)                             | Max (mm)                      | (Nm)        | M       | Max                | Max (mm)       |
| 48.3     | 47-49          | 18    | 68         | 140     | 54                               | 20                            | 10          | M8*60   | 5°                 | 60             |
| 60.3     | 59-61          | 18    | 80         | 140     | 54                               | 20                            | 10          |         | 5°                 | 60             |
| 76.1     | 75-77          | 18    | 98         | 140     | 54                               | 20                            | 20          | M8*80   | 5°                 | 60             |
| 88.9     | 87-91          | 18    | 111        | 200     | 76                               | 25                            | 20          |         | 5°                 | 90             |
| 114.3    | 113-116        | 16    | 137        | 200     | 76                               | 25                            | 30          | M8*80   | 5°                 | 90             |
| 139.7    | 138-142        | 16    | 164        | 200     | 76                               | 25                            | 40          |         | 5°                 | 90             |
| 168.3    | 167-170        | 16    | 192        | 200     | 76                               | 25                            | 40          | M12*120 | 5°                 | 90             |
| 219.1    | 216-222        | 10    | 250        | 250     | 85                               | 30                            | 80          |         | 5°                 | 100            |
| 273      | 270-276        | 10    | 303        | 250     | 85                               | 30                            | 80          |         | 5°                 | 100            |
| 325      | 322-328        | 10    | 356        | 250     | 85                               | 30                            | 80          |         | 5°                 | 100            |
| 377      | 374-380        | 10    | 408        | 250     | 85                               | 30                            | 80          |         | 5°                 | 100            |